




ACP AIRCONDITIONING

ECO-COOL

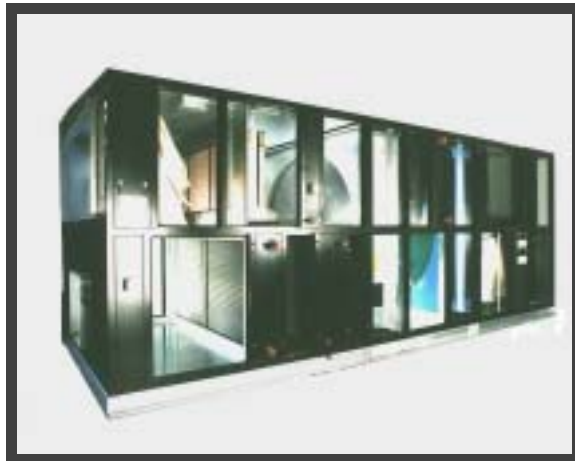

**COOLING and
DE-HUMIDIFICATION
WITHOUT USING REFRIGERANTS**

CABINET SPECIFICATION.

FRAMEWORK:

Each AHU or AHU section is fabricated with a framework of 50mm extruded aluminium boxed section with die cast aluminium or nylon corner joints and accessories.

OPTIONS: Anodised finish, nylon corners and accessories, extensions for valves, bulkhead lights wired to outside switch, enclosures for control panel, enclosure with internal walkway (on larger units).

PANELS:

The frame is clad with 25mm thick double skinned insulated panels, which fit into the rebated edges of the corner or intermediate section, to form a continuous flush surface.

Minimum metal thickness is 0.9mm and outer skin is plasticised steel sheet. Inner skin is self-finish galvanised steel sheet. Standard colour finishes are available.

All panels are sealed against framework with neoprene rubber gasket. On 50mm framing, a tubular rubber gasket can be mechanically fitted to a preformed groove in the section for extra quality seal.

OPTIONS: 50mm panel thickness, increased metal skin thickness, range of alternative colour finishes, range of acoustic constructions - high density board, perforated inner skin, septum plates, thicker panel skins, etc.

ACCESS PANELS:

Panels secured in place by tool operated turn

locks. (A single half turn latches the panel and then applies pre-set compressive pull-up) Complete with pull-off grips or grab handles (depending on panel size).

OPTIONS: Lift off doors, hinged doors, tool operated lockable handle, key operated lockable handle, double handle with internal release, inspection windows, electrical interlock switches fitted.

INSULATION:

25mm thick mineral wool slab, minimum density 45 Kg/m³

EXTRAS: High density acoustic infill.

BASES:

Each AHU (or AHU section) is normally fitted underneath with a base frame. After fabrication the base is cleaned, primed and finished in black hammerite paint or anodised on aluminium bases.

EXTERNAL AHU: Fitted with pitched weather roof overhung all round as standard. All fixed panels mastic sealed in place and additional gaskets used on removable panels.

PRESENTED BY



ACP AIRCONDITIONING

Walter House, Star Road
Partridge Green, Horsham
West Sussex, RH13 8RA

TEL 01403 713600 FAX 01403 713620

e-mail: acp.ac@btinternet.com